


3. 上げ蓋式鉄筋コンクリートU形 本体

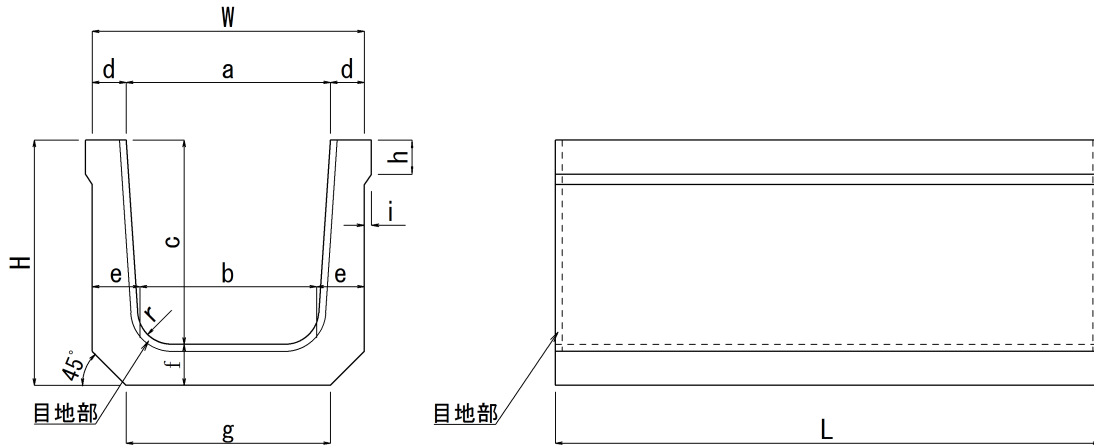

| 呼び名 | 寸法 (mm) | | | | | | | | | | | | | 参考重量 (kg) |
|------|---------|-----|-----|-----|-----|----|----|-----|-----|------|------|----------|------------------|--------------|
| | W | H | a | b | c | d | e | f | g | h | i | r | L | |
| 240 | 354 | 290 | 240 | 220 | 240 | 57 | 50 | 50 | 240 | 35 | 13.0 | 50 | 1,000 (2,000) | 95(190) |
| 300A | 430 | 300 | 300 | 260 | | 65 | 60 | 60 | 300 | 40 | 17.5 | | | 70 |
| 300B | | 360 | | | 300 | | | | | 60 | | 50 | 136(272) | |
| 300C | 490 | 425 | 360 | 310 | 360 | 65 | 65 | 360 | 55 | 22.5 | 70 | 155(310) | | |
| 360B | | 360 | | | | | | | 310 | | | 65 | 55 | 160(320) |
| 450 | 600 | 520 | 450 | 400 | 450 | 75 | 70 | 70 | 430 | 60 | 22.5 | 70 | 228(456) | |
| 600 | 780 | 680 | 600 | 540 | 600 | 90 | 80 | 80 | 600 | 70 | 23.0 | 70 | 353(706) | |
| 許容差 | - | - | ±2 | ±3 | ±2 | ±2 | ±3 | ±3 | - | - | - | - | ±5 | |