
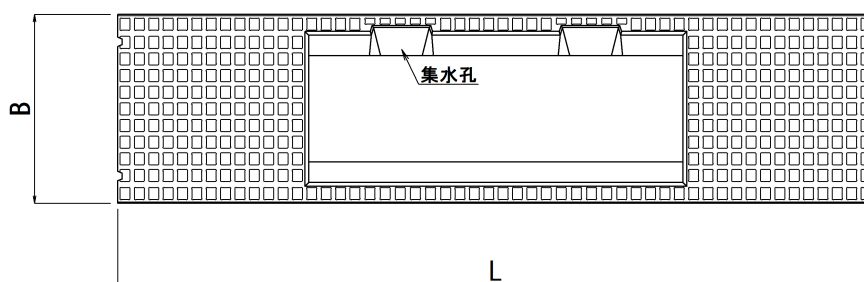
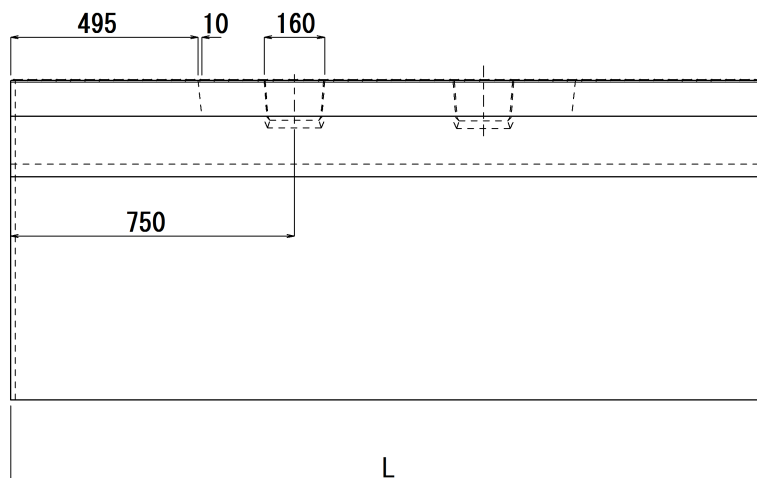



20. アートV S 本体

標準品 L=2,000


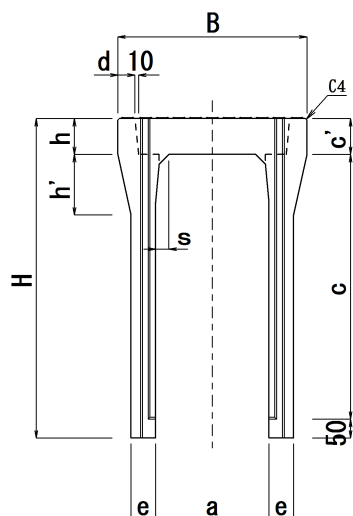


20. アートV S 蓋

車道用



歩道用

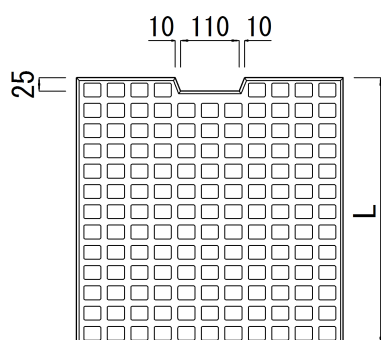

種類	呼び名	寸法 (mm)					参考重量 (kg)
		b	b1	t	t1	L	
車道用	300	400	380	95	-	500	42
	400	500	480	110			61
	500	600	580	125			84
	600	700	680	140			111
歩道用	300	400	380	95	55	500	31
	400	500	480	110	65		44
	500	600	580	125	70		57
	600	700	680	140	80		74

※グレーチング蓋はご相談ください。

寸法の許容差

呼び名	b・b1	t	L
車道用 300～600	±5, -3	± 3	±5, -3
歩道用 300～600	±5, -3	± 3	±5, -3

標準品 L = 2, 0 0 0




呼 び 名 (幅 × 深)	寸 法 (mm)											参考重量 (kg)		
	B	H	a	c	c'	d	e	h	h'	s	L			
300× 300	500	445	300	300	95	45	50	95	100	25	2,000	326		
300× 400		545		400			55		150	30		403		
300× 500		645		500					150	30		455		
300× 600		745		600			65		160	35		560		
300× 700		845		700					160	35		625		
300× 800		945		800			75		170	40		760		
300× 900		1,045		900					170	40		830		
300×1,000		1,145		1,000			85		180	45		995		
300×1,100		1,245		1,100								1,070		
300×1,200		1,345		1,200								1,145		
400× 400	610	560	400	400	110	50		55			110	150	30	2,000
400× 500		660		500			60	160	40	535				
400× 600		760		600				160	40	590				
400× 700		860		700			70	170	45	715				
400× 800		960		800				170	45	780				
400× 900		1,060		900			80	180	50	930				
400×1,000		1,160		1,000				180	50	1,000				
400×1,100		1,260		1,100			90	190	55	1,180				
400×1,200		1,360		1,200						1,270				
500× 400		720		575			500	400	125	55		60	125	
500× 500	675		500	160	40	600								
500× 600	775		600	70	170	50		715						
500× 700	875		700		170	50		780						
500× 800	975		800	85	180	60		845						
500× 900	1,075		900					180			60	1,040		
500×1,000	1,175		1,000					180			60	1,120		
500×1,100	1,275		1,100					180			60	1,200		
500×1,200	1,375		1,200	95	190	70		1,390						
500×1,300	1,475		1,300					1,480						
500×1,400	1,575	1,400	1,570											
600× 400	830	590	600				400	140	60	65	140	170	50	2,000
600× 500		690		500	170	50	700							
600× 600		790		600	75	180	60					760		
600× 700		890		700								180	60	
600× 800		990		800	90	190	70			960				
600× 900		1,090		900						190		70	1,030	
600×1,000		1,190		1,000						190		70	1,240	
600×1,100		1,290		1,100						190		70	1,320	
600×1,200		1,390		1,200	100	200	80			1,410				
600×1,300		1,490		1,300						1,620				
600×1,400		1,590		1,400						1,710				
600×1,500		1,690		1,500						1,800				

寸法の許容差

呼び名	B・a	H・c	d・e	C'	L
300	± 5	± 5	+3, -2	± 3	± 5
400	± 5	± 5	+3, -2	± 3	± 5
500	± 7	± 5	+3, -2	± 3	± 5
600	± 7	± 5	+3, -2	± 3	± 5

20. アート V S 本体

L調整品 L=1,500

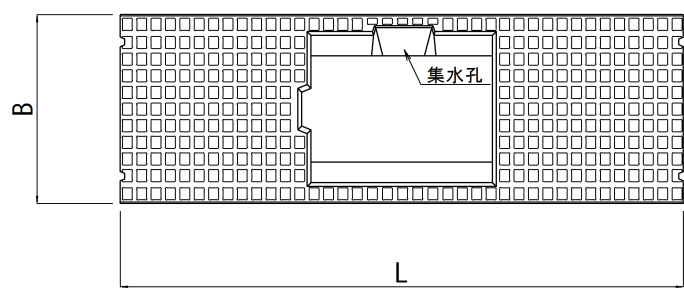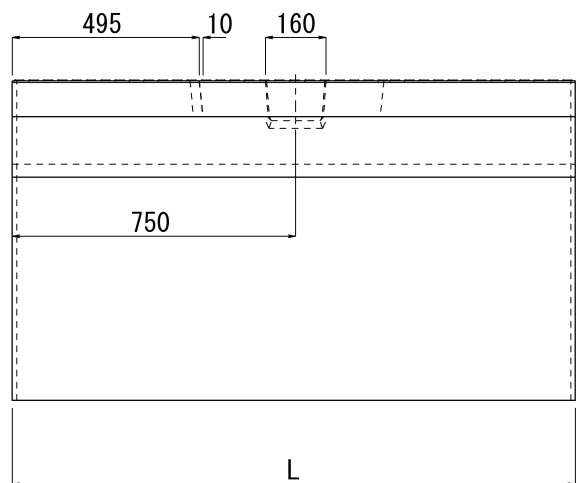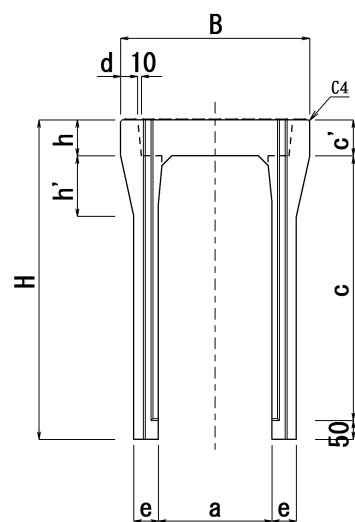

寸法の許容差

呼び名	B・a	H・c	d・e	C'	L
300	± 5	± 5	+3, -2	± 3	± 5
400	± 5	± 5	+3, -2	± 3	± 5
500	± 7	± 5	+3, -2	± 3	± 5
600	± 7	± 5	+3, -2	± 3	± 5


L調整品 L = 1,500

呼 び 名 (幅 × 深)	寸 法 (mm)											参考重量 (kg)
	B	H	a	c	c'	d	e	h	h'	s	L	
300× 300	500	445	300	300	95	45	55	95	150	25	1,500	285
300× 400		545		400								324
300× 500		645		500								362
300× 600		745		600								465
300× 700		845		700			70	95	165	35		510
300× 800		945		800								560
300× 900		1,045		900			85	95	180	45		705
300×1,000		1,145		1,000								765
300×1,100		1,245		1,100								825
400× 400	610	560	400	400	110	50	60	110	160	30	1,500	391
400× 500		660		500								434
400× 600		760		600								475
400× 700		860		700								590
400× 800		960		800			75	110	175	40		645
400× 900		1,060		900								695
400×1,000		1,160		1,000			90	110	190	50		855
400×1,100		1,260		1,100								920
400×1,200		1,360		1,200								980
500× 400	720	575	500	400	125	55	60	125	160	40	1,500	454
500× 500		675		500								496
500× 600		775		600								535
500× 700		875		700								675
500× 800		975		800			80	125	175	50		735
500× 900		1,075		900								790
500×1,000		1,175		1,000			95	125	190	60		845
500×1,100		1,275		1,100								1,020
500×1,200		1,375		1,200								1,080
500×1,300		1,475		1,300								1,150
500×1,400		1,575		1,400								1,220
600× 400	830	590	600	400	140	60	65	140	170	50	1,500	540
600× 500		690		500								585
600× 600		790		600								630
600× 700		890		700								675
600× 800		990		800			85	140	185	60		835
600× 900		1,090		900								895
600×1,000		1,190		1,000			100	140	200	70		950
600×1,100		1,290		1,100								1,010
600×1,200		1,390		1,200								1,200
600×1,300		1,490		1,300								1,270
600×1,400		1,590		1,400								1,340
600×1,500		1,690		1,500			1,410					

※ サイズによって、e , h' , s が標準品と異なる場合があります。

20. アート V S 本体

L調整品 L=1,000 (全スラブタイプ)

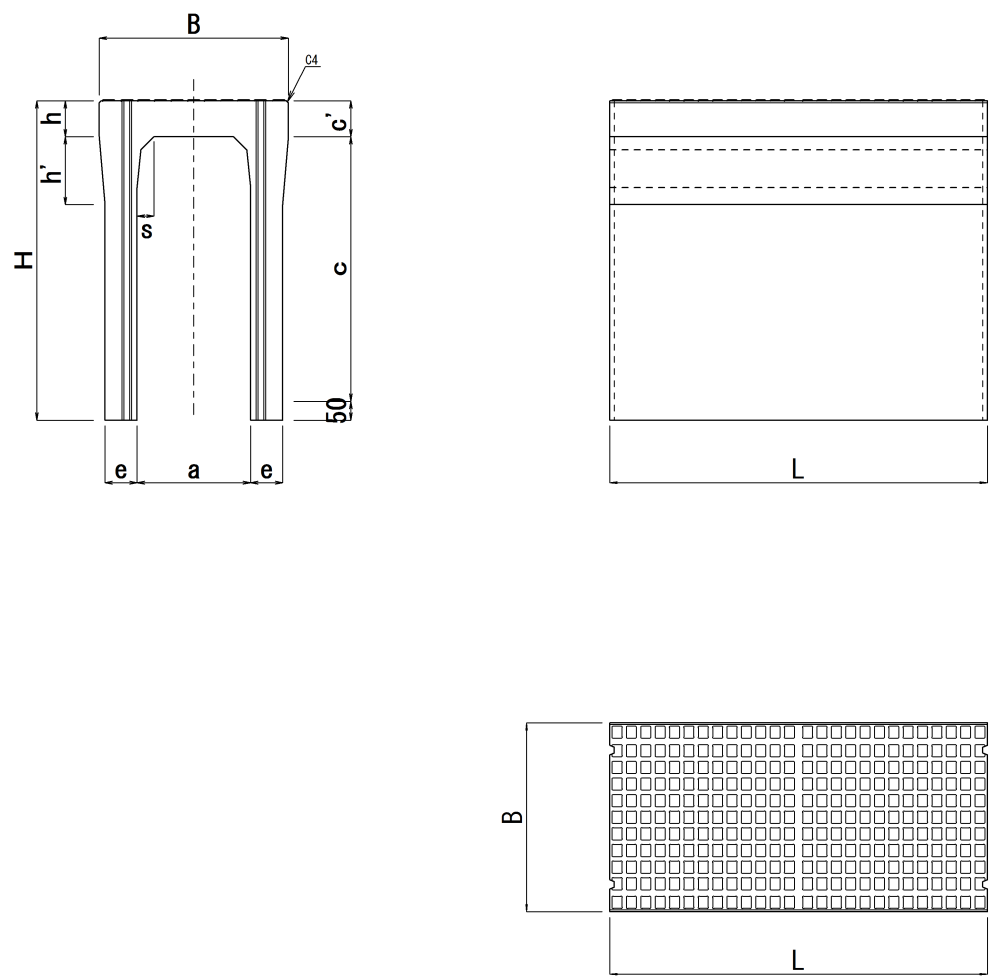

寸法の許容差


呼び名	B・a	H・c	e	C'	L
300	± 5	± 5	+3, -2	± 3	± 5
400	± 5	± 5	+3, -2	± 3	± 5
500	± 7	± 5	+3, -2	± 3	± 5
600	± 7	± 5	+3, -2	± 3	± 5

L調整品 L=1,000 (全スラブタイプ)

呼 び 名 (幅 × 深)	寸 法 (mm)										参考重量 (kg)
	B	H	a	c	c'	e	h	h'	s	L	
300× 300	500	445	300	300	95	85	95	180	45	1,000	266
300× 400		545		400							306
300× 500		645		500							345
300× 600		745		600							385
300× 700		845		700							425
300× 800		945		800							465
300× 900		1,045		900							505
300×1,000		1,145		1,000							545
300×1,100		1,245		1,100							585
300×1,200		1,345		1,200							625
400× 400	610	560	400	400	110	90	95	180	55	1,000	357
400× 500		660		500							400
400× 600		760		600							442
400× 700		860		700							484
400× 800		960		800							526
400× 900		1,060		900							569
400×1,000		1,160		1,000							611
400×1,100		1,260		1,100							653
400×1,200		1,360		1,200							696
500× 400	720	575	500	400	125	95	125	190	70	1,000	434
500× 500		675		500							478
500× 600		775		600							523
500× 700		875		700							568
500× 800		975		800							612
500× 900		1,075		900							657
500×1,000		1,175		1,000							702
500×1,100		1,275		1,100							746
500×1,200		1,375		1,200							791
500×1,300		1,475		1,300							836
500×1,400		1,575		1,400							880
600× 400	830	590	600	400	140	100	140	200	80	1,000	510
600× 500		690		500							557
600× 600		790		600							604
600× 700		890		700							651
600× 800		990		800							698
600× 900		1,090		900							745
600×1,000		1,190		1,000							792
600×1,100		1,290		1,100							839
600×1,200		1,390		1,200							886
600×1,300		1,490		1,300							933
600×1,400		1,590		1,400							980
600×1,500		1,690		1,500							1,027

※ サイズによって、e , h' , s が標準品と異なる場合があります。


20. アートV S 本体（横断用）

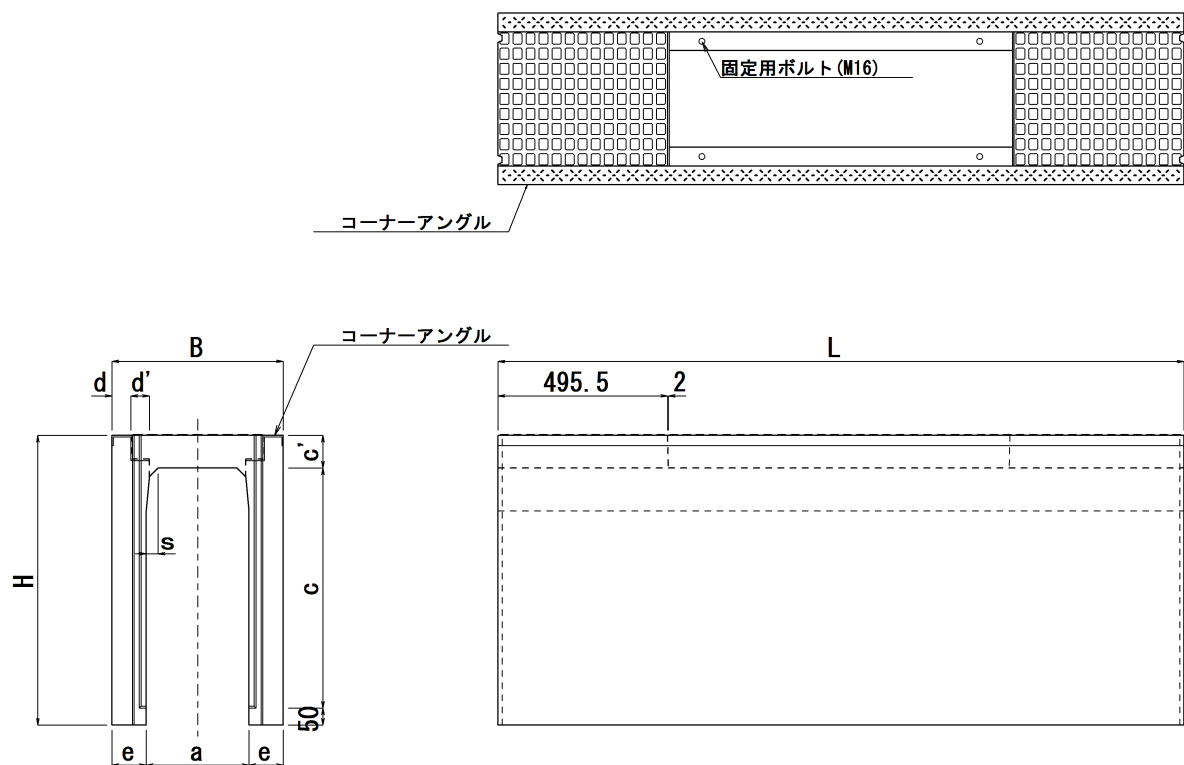

寸法の許容差

呼び名	B・a	H・c	d・e	C'	L
300	± 5	± 5	+3, -2	± 3	± 5
400	± 5	± 5	+3, -2	± 3	± 5
500	± 7	± 5	+3, -2	± 3	± 5
600	± 7	± 5	+3, -2	± 3	± 5

グレーチング（並目）

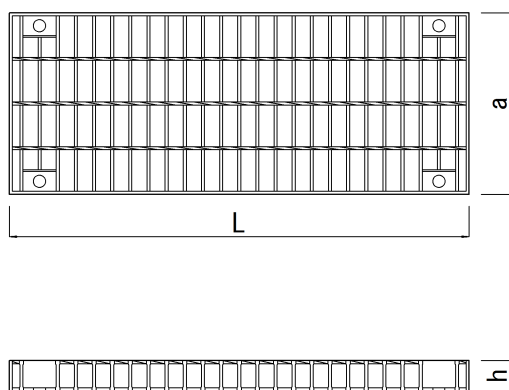

呼び名	寸 法 (mm)			自動車 荷 重
	a	h	L	
300用	400	60	995	T-25
400用	500	75		
500用	600	75		
600用	700	90		

※細目等のグレーチングはご相談ください。

横断用 L = 2, 0 0 0


呼 び 名 (幅 × 深)	寸 法 (mm)										参考重量 (kg)
	B	H	a	c	c'	d	d'	e	s	L	
300× 300	520	445	300	285	110	55	64	110	45	2,000	538
300× 400		545		385							627
300× 500		645		485							715
300× 600		745		585							833
300× 700		845		685							928
300× 800		945		785							1,024
300× 900		1,045		885							1,155
300×1,000		1,145		985							1,257
300×1,100		1,245		1,085							1,359
400× 400	630	560	400	385	125	60	64	115	55	2,000	721
400× 500		660		485							814
400× 600		760		585							907
400× 700		860		685							1,032
400× 800		960		785							1,132
400× 900		1,060		885							1,232
400×1,000		1,160		985							1,370
400×1,100		1,260		1,085							1,477
400×1,200		1,360		1,185							1,584
500× 400	750	575	500	385	140	67	73	125	70	2,000	870
500× 500		675		485							988
500× 600		775		585							1,105
500× 700		875		685							1,223
500× 800		975		785							1,340
500× 900		1,075		885							1,458
500×1,000		1,175		985							1,575
500×1,100		1,275		1,085							1,693
500×1,200		1,375		1,185							1,810
500×1,300		1,475		1,285							1,928
500×1,400		1,575		1,385							2,045
600× 400	860	590	600	385	155	72.5	75	155	80	2,000	971
600× 500		690		485							1,093
600× 600		790		585							1,215
600× 700		890		685							1,338
600× 800		990		785							1,460
600× 900		1,090		885							1,582
600×1,000		1,190		985							1,704
600×1,100		1,290		1,085							1,826
600×1,200		1,390		1,185							1,949
600×1,300		1,490		1,285							2,071
600×1,400		1,590		1,385							2,193
600×1,500		1,690		1,485							2,315

※B , e , s は、標準品と異なります。

※コーナーアングル頂部はスリップ抑制模様付きです。

※2 tを超える製品は、車上渡しになります。

20. アートVS 本体（45°隅切り用）

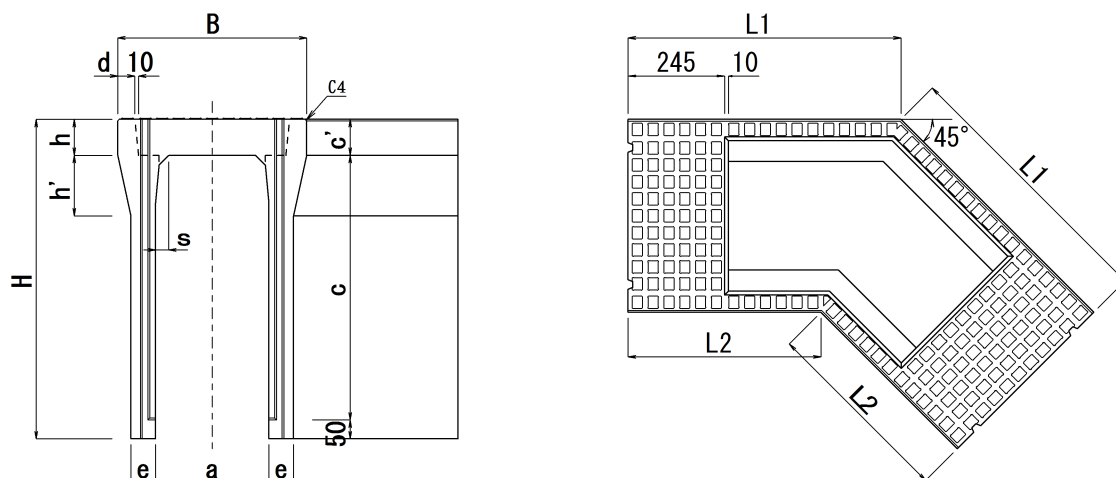


呼　　び　　名 (　幅×深　)	寸										
--------------------	---	--	--	--	--	--	--	--	--	--	--

※ サイズによって、e , h' , s が標準品と異なる場合があります。

寸法の許容差

呼び名	B・a	H・c	e	C'	L
300	± 5	± 5	+3, -2	± 3	± 5
400	± 5	± 5	+3, -2	± 3	± 5

20. アートV S 蓋（45°隅切り用）


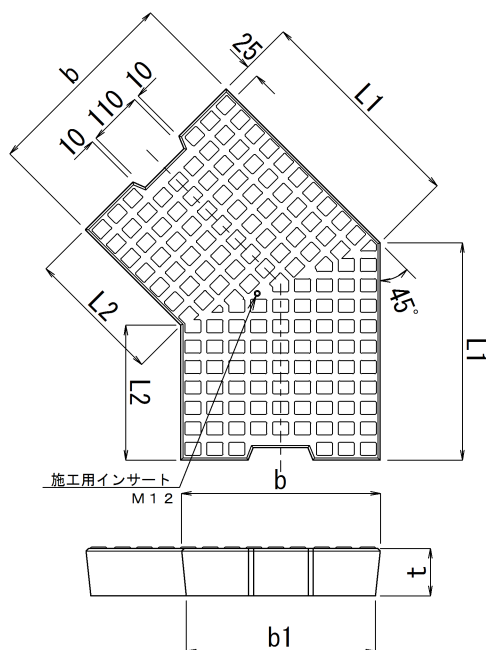


種 類	呼び名	寸 法 (mm)					参考重量 (kg)
		b	b1	t	L1	L2	
車道用	300	400	380	95	437	271	60
	400	500	480	110	480	273	93

寸法の許容差

呼び名	b・b1	t	L
車道用 300～400	±5, -3	± 3	±5, -3

20. アートV S 本体（45°切廻し用）

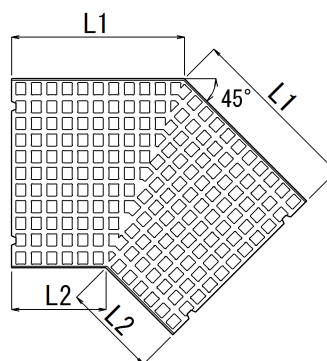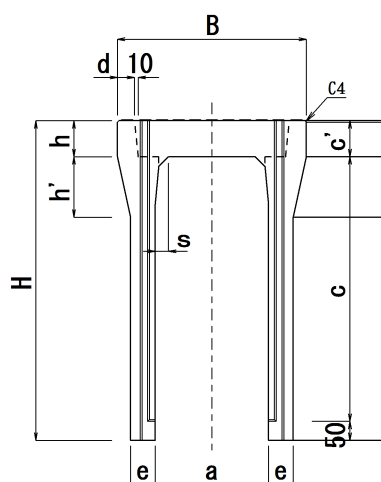

呼 び 名 (幅 × 深)	寸 法 (mm)											参考重量 (kg)
	B	H	a	c	c'	e	h	h'	s	L1	L2	
300× 300	500	445	300	300	95	85	95	180	45	457	250	185
300× 400		545		400								214
300× 500		645		500								242
300× 600		745		600								269
300× 700		845		700								297
300× 800		945		800								325
300× 900		1,045		900								352
300×1,000		1,145		1,000								380
300×1,100		1,245		1,100								409

※ サイズによって、e , h' , s が標準品と異なる場合があります。

寸法の許容差

呼び名	B・a	H・c	e	C'	L
300	± 5	± 5	+3, -2	± 3	± 5