


44. ヒューム管 B形

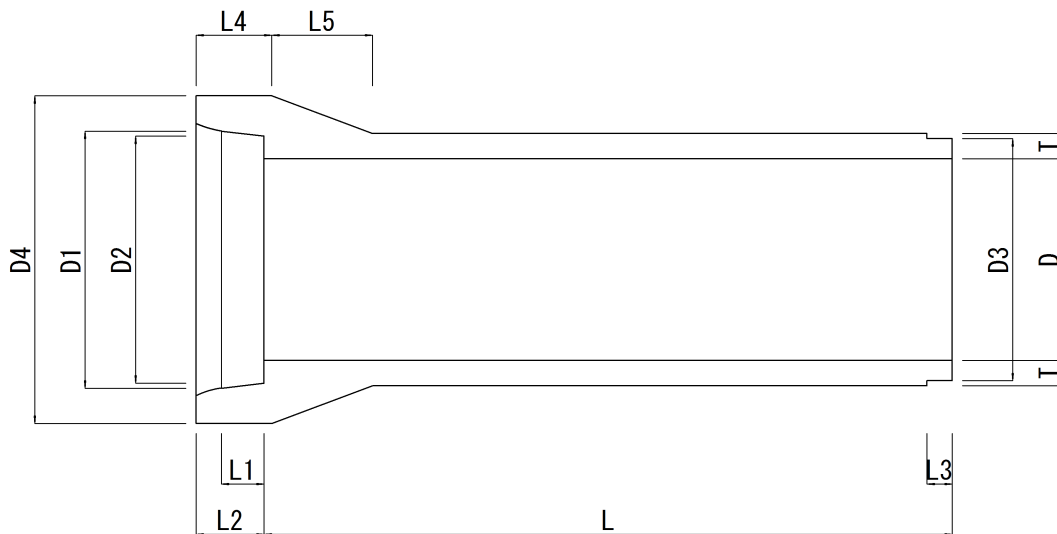

呼び名	寸法 (mm)												参考重量 (kg)	端末用 (kg)		
	D	D1	D2	D3	D4	T	L1	L2	L3	L4	L5	L				
150	150	210	206	194	262	26	65	90	32	115	50	2,000	77	70		
200	200	262	258	246	316	27					55		103	94		
250	250	314	310	298	370	28				120	60		131	119		
300	300	368	364	350	424	30					65		165	151		
350	350	422	418	404	482	32					70		204	187		
400	400	478	474	460	544	35	70	95	36	70	2,430		306	283		
450	450	534	530	516	606	38				75			75	373	347	
500	500	592	588	574	672	42				100			85	459	430	
600	600	708	704	690	804	50	105	100	660				606			
700	700	824	820	802	936	58	80	110	40	135			2,430	899	820	
800	800	940	936	918	1,068	66				85		115		1,170	1,060	
900	900	1,058	1,054	1,036	1,204	75				88		125		1,520	1,360	
1,000	1,000	1,172	1,168	1,150	1,332	82	100	125	42	165		2,430		1,850	1,660	
1,100	1,100	1,286	1,282	1,260	1,458	88				104				130	2,190	1,960
1,200	1,200	1,400	1,396	1,374	1,586	95				108				135	185	2,600
1,350	1,350	1,566	1,562	1,540	1,768	103	195	205	3,190		2,810					

※呼び径150～350の半管の有効長は1,000mm、呼び径400～1,350の半管の有効長は1,200mmです。

※呼び径1,500以上はNC形管となります。

※参考重量が、2 t以上は車上渡しとなります。

呼び名	内径 D	厚さ T	有効長L
150～250	± 3	+3,-2	+10,-5
300～900	± 4	+4,-2	
1,000～1,350	± 6	+6,-3	